




DESIGN ÚNICO, AMPLA VISIBILIDADE
E BAIXO CONSUMO ENERGÉTICO.

UNIQUE DESIGN, OPTIMIZED VISIBILITY
AND LOW ENERGY CONSUMPTION.

ATRATIVO DISEÑO, AMPLIA VISIBILIDAD
Y BAJO CONSUMO ENERGÉTICO.



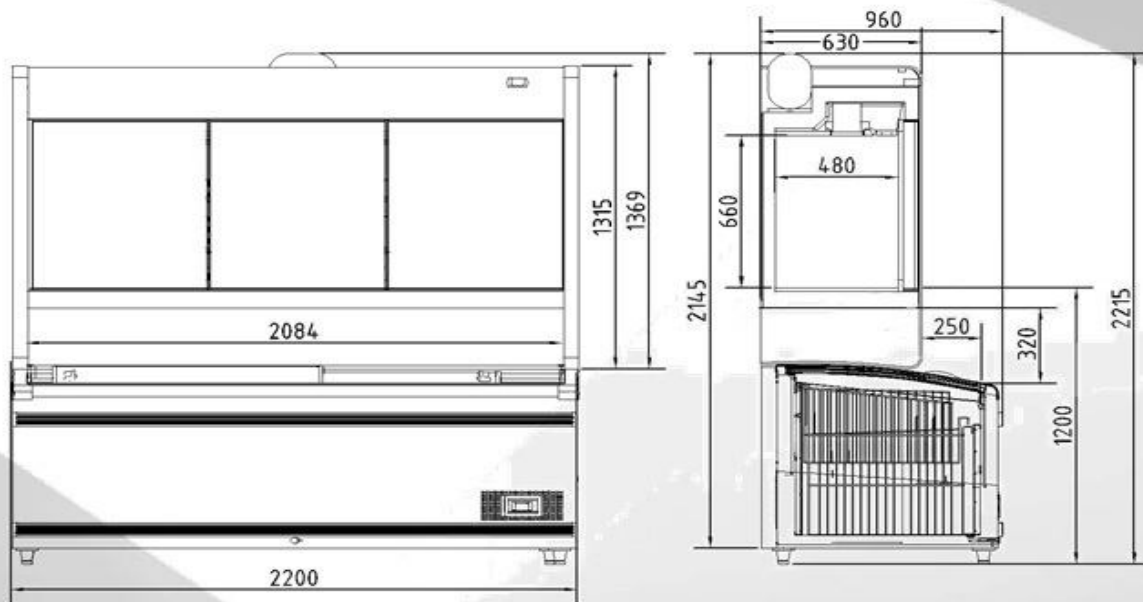

> COMBI

INFORMAÇÃO GERAL

Comprimento Ext.
Altura Exterior
Profundidade Ext.
Capacidade Bruta
Capacidade Líquida
Gás Refrigerante
Classe Climática
Características Energ.
Consumo Eléctrico
Isolamento
Espessura Isolamento
Tipo de Tampas
Temperatura de Funcionamento

GENERAL DATA

Outer Length
Outer Height
Outer Depth
Gross Capacity
Net Capacity
Refrigerant
Climatic Conditions
Energy Characteristics
Power Consumption
Insulation
Insulation Thickness
Lids
Inner temperature range

DATOS TÉCNICOS

Longitud Exterior
Alcra Exterior
Fondo Exterior
Volumen Bruto
Volumen Neto
Refrigerante
Clase Climática
Características Energ.
Consumo de Energía
Aislamiento
Espesor Aislamiento
Tapas
Temperatura de aplicación

Upperdeck (Top of COMBI)

2200 mm
1369 mm
630 mm
688 Lts
614 Lts
R 404 A
Cl. 4 (30°C/55% HR)
230V/50Hz
28 kWh/24h
Ciclopentano
70 mm
Vidro - Glass
-16°C to -24°C

COMBI (Upperdeck + LSL 2200)

2200 mm
2215 mm
960 mm

Este folheto é meramente informativo e sujeito a alterações dos dados técnicos. Não pode ser usado como documento contratual.
This leaflet is merely informative and subject to changes in technical data, and may not be used as a contractual document.
Este catálogo tiene valor meramente informativo y con sujeción a modificaciones de los datos técnicos, no constituye un documento contractual.



TECHNICAL CARD


Ref. Reg.165

Review: 1

Date: 06/01/2015

Upperdeck 2200 LSL

TECHNICAL SPECIFICATIONS		INTERNAL DIMENSIONS	
MODEL	Upperdeck 2200 LSL	Height	660 mm
EQUIPMENT TYPE	Freezer - Automatic Defrost	Depth	480 mm
		Width	2048 mm
INNER TEMPERATURE RANGE	-24 °C / -16 °C -11,2 °F / 3,2 °F	INFO	
GROSS VOLUME	688 l 24,3 Ft ³	Lid/door Type	Door - Glass
NET VOLUME	614 l 21,68 Ft ³	External coating	Pre Painted Sheet
EXTERNAL DIMENSIONS		Internal coating	Pre Painted Sheet
Height	1369 mm	Wall Thickness	70 mm
Depth	630 mm	Climate Class	4
Width	2200 mm	Freezing Capacity	N/A

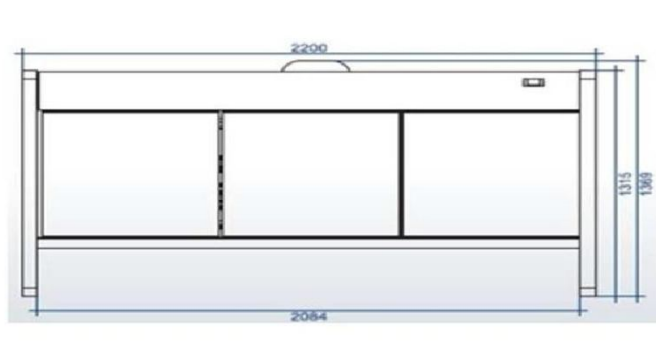

ENERGETIC FEATURES	
VOLTAGE / FREQUENCY	230V - 50Hz
NOMINAL CURRENT	6,2 A
POWER	1260 W
CONSUMPTION	28 kWh/24hr
ENERGY EFFICIENCY	-
COMPRESSOR PROTECTION	External - Bimetallic
NOISE LEVEL	<55 dB
ACCESSORIES	
BASKETS	0
DIVIDER	3
SHELVES	3
WATER DRAIN	Yes
WATER TRAY	No
THERMOMETER	Yes - Digital
LOCK	No

COMPONENTS	
COMPRESSOR	Embraco
Modelo	NT2212GK
Displacement	27,8 cm ³
Rated Power	999 W
CONDENSER	Ventilated
VENTILATORS	EBMPAPST
Power	10 W
THERMOSTAT	Digital
REFRIGERANT	R404A
Quantity	750 g 26,46 oz
Operating Pressure	300 Psi
EVAPORATOR	Ventilated
LIGHT	LED
Power	12,8 W

Approved by:

Date: 12/01/2016

Document uncontrolled when printed or copied.

This leaflet is merely informative and subject to changes in technical data, and may not be used as a contractual document.

©All Rights Reserved

122